


Global Leader in Advanced Technology

6C500D Unloader Bus Compressor

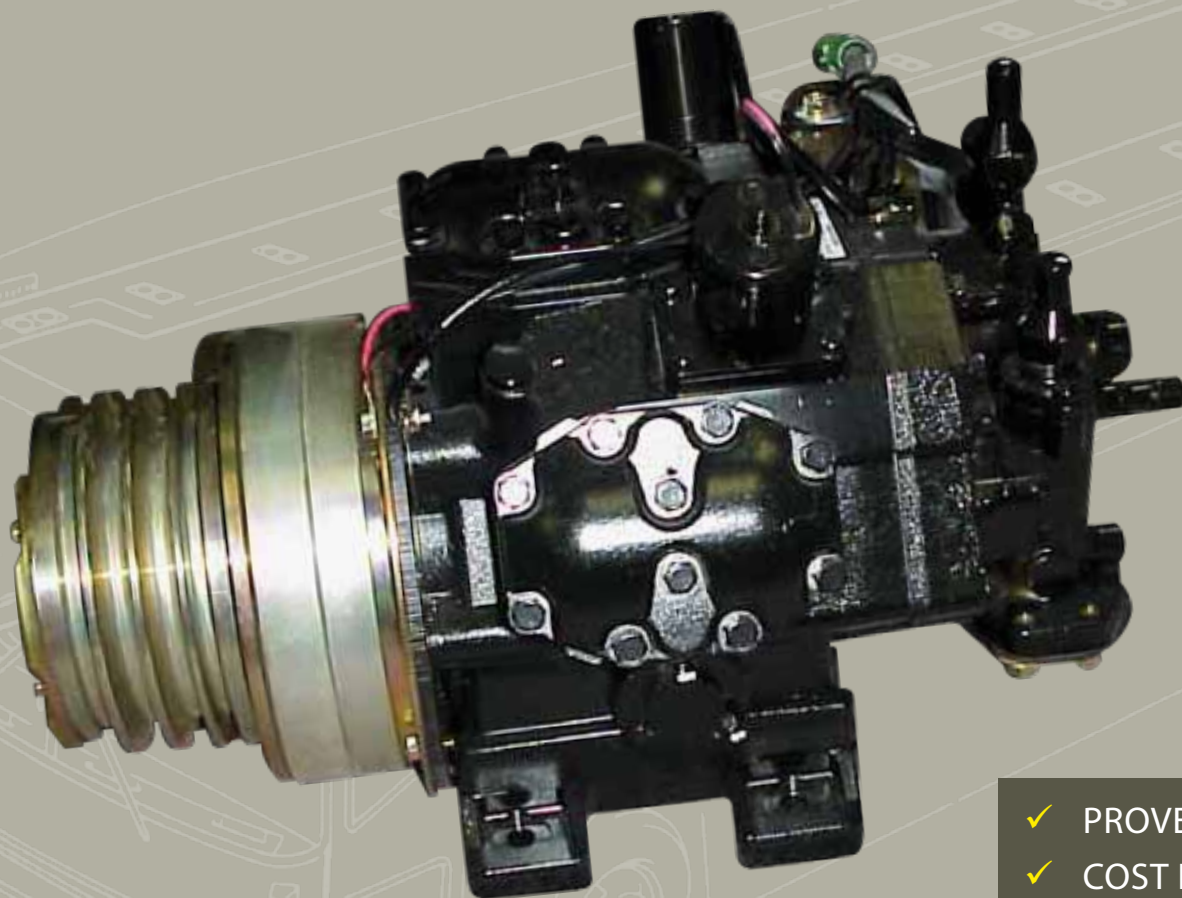

SPECIFICATIONS

COMPRESSOR	
Bore	50Ømm
Stroke	42mm
Number of cylinders	6
Piston displacement	Full 495cc 2/3 330cc 1/3 165cc
Max speed	3000 rpm
Lubricant	ND-OIL8 1700cc
Weight	30.5kg
CLUTCH	
V-Belt	B type - 4 groove
Weight	20.4kg
Rated voltage	24V
Transmission torque	MIN 196 N.m (144 lbf.ft)
Min operating current	MAX 1.7A
Power consumption	60W
Maximum allowable speed	3000 rpm
Pulley diameter	Ø170mm
Direction of rotation	Clockwise
Service valves	Rear

Specs and sizes are subject to change without notice. The figures in the above table are for your reference only. Specs herein refer to those as of April 2008.

- ✓ PROVEN RELIABILITY
- ✓ COST EFFECTIVE MAINTENANCE
- PLUS** DENSO global network assures full support on warranty service, installation and maintenance

DENSO is the global leader in bus and coach air-conditioning with a market share of over 25%. More than two million DENSO bus air-conditioners have been sold worldwide, with DENSO the most experienced and reliable manufacturer on Australian soil.